




OPX mobilis® Operating Tables for Outpatient Departments and Operating Theatres Unique Flexibility and Reliability



OPX mobilis® 200 – Operating Table of great manoeuvrability with manual and hydraulic adjustments	page	4-7
OPX mobilis® 300 Universal Operating Tables for all surgical disciplines	page	8-13
OPX mobilis® RC Universal Operating Tables with hand-held control, satisfying high demands in surgery	page	14-19
OPX mobilis® Operating Tables Features	page	20-23
Positionings OPX mobilis® 300 and OPX mobilis® RC	page	24-29
Accessory Kits suitable for different surgical disciplines	page	30-31 The accessories are authorized for SCHMITZ operating tables only. There is no other purpose of use.

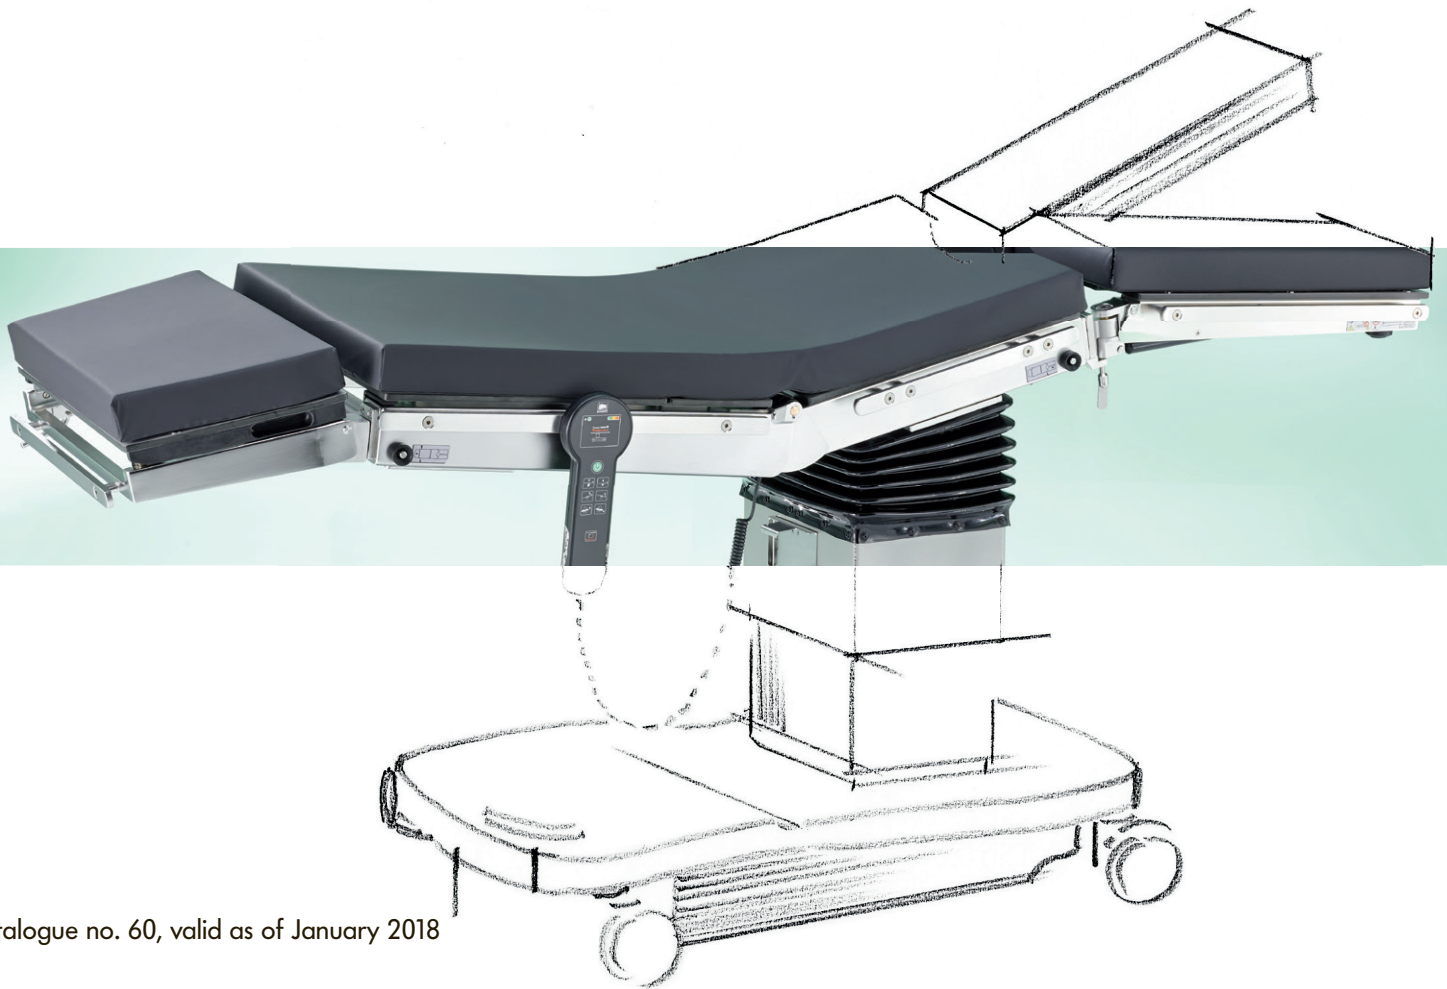

1



2



3



4



5



6

OPX mobilis® 200

Mobile and light-weight Operating Tables

CE

Tunnel for X-ray cassette,
radiolucent table top

Soft, detachable SAF pads,
pressure absorbent, impermeable
to fluids and antistatic



Back section adjustment,
servo-assisted and integrated
safety mechanism

2 preselector levers for high/low
and Trendelenburg positions

Pedal for central brake of the castors

Pump lever for high/low
and Trendelenburg adjustments



Minimum gaps between padding,
no danger of crushing



Sealed surfaces,
easy to clean

4 extremely easy-glide double castors,
swivelling, 2 of which antistatic,
with cap against fluids

Floor pan for hygienic sealing
of the underside of the table base

**Model No. 161.2010.1 illustrated
with head rest 101.2580.1
and leg section 101.2170.1**

OPX mobilis® 200 CE

Description



mobilis® 200 Model No. 161.2010.1

Operating table with hydraulic foot pump for the following two movements:
High/Low, Trendelenburg/Reverse Trendelenburg

Two-part, radiolucent table top comprising:

Back section, seat section with cut-out for gynaecology

With servo-assisted adjustment of the back section. Integrated cassette tunnel.

Antistatic SAF pads, 60 mm thick. Table frame construction of stainless steel, sandblasted and electropolished, disinfectant-proof. Side rails of stainless steel, 25 x 10 mm, on both sides of the table top for attaching accessories, column with stainless steel panelling. Mobile on four double-casters with cap against fluids, 2 of which antistatic, central brake by foot pedal.

Mobile base and floor pan in shock-resistant ABS, disinfectant proof.

Please consider head and leg sections as basic accessories!

mobilis® 200/G Model No. 161.2050.1

similar to model 161.2010.1, but with integrated body/kidney elevator.



Head rest Model No. 101.2580.1

servo-assisted one-hand tilting, detachable at the push of a button, with integrated X-ray cassette tunnel.



Head rest Model No. 101.2590.1

double-adjustment, servo-assisted weight compensation, detachable at the push of a button, with integrated X-ray cassette tunnel.



2 Section leg section Model No. 101.2170.1

manual swivelling and servo-assisted tilting with weight compensation, detachable at the push of a button.



Leg section Model No. 101.2180.1

one-piece version, servo-assisted tilting, detachable at the push of a button.



For further accessories, see catalogue no. 92.

Technical Data

Positioning Examples

Width of table top	540 mm
Total width	590 mm
Base plate (length x width)	1,120 mm x 580 mm
Diameter of the castors	125 mm
Height adjustment (w/o pads)	690 mm - 1,050 mm
Trendelenburg, hydraulic	30°
Reverse Trendelenburg, hydraulic	30°
Back section	+ 75/ - 50°
Leg section	+ 20/ - 90°
Head section	+ 30/ - 45°
net weight mobilis 200, 200/G incl. head and leg sections	160 kg
Weight capacity*:	
Max. static load	up to 250 kg
Safe working load	up to 185 kg

* The weight capacity may vary depending on the patient's orientation and position on the tabletop.

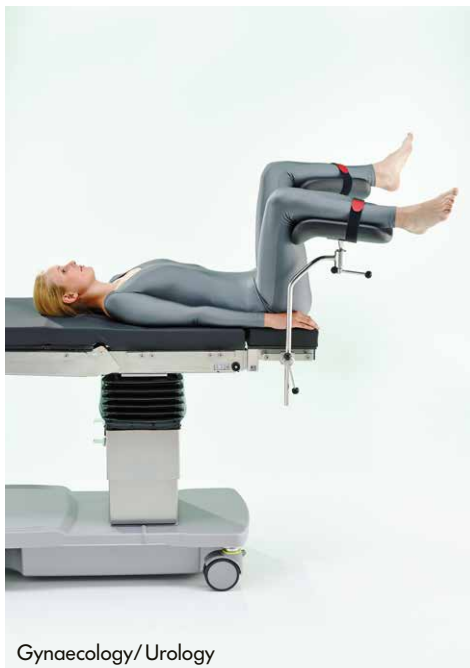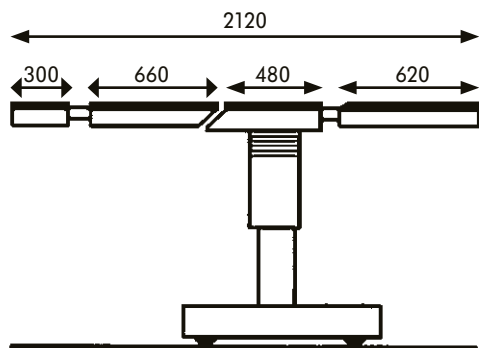

OPX mobilis® 300

Mobile Universal Operating Tables

CE

- Longitudinal displacement of the table top by up to max. 250 mm for optimal use of X-ray amplifier (L models only)
- integrated kidney/body elevator adjustable from the head end by means of a foot pedal (G models only)



Soft, detachable SAF pads, pressure absorbent, impermeable to fluids and antistatic



Tunnel for X-ray cassette, radiolucent table top

Back section adjustment, servo-assisted and integrated safety mechanism

mobilis® 300 C
Model No. 161.3110.1
with head rest 101.2590.1
and leg section 101.2170.1

2 preselector levers for high/low, lateral and Trendelenburg positions

Three-way pedal for straight run, free movement and central brake of the castors

Pump lever for high/low, lateral and Trendelenburg adjustment





Minimum gaps between padding,
no danger of crushing



Sealed surfaces,
easy to clean

1 spring-loaded directional castor for precise
straight forward movement as well as exact turning
on the spot, activated by three-way pedal

Floor pan for hygienic sealing of the underside
of the table base

Design: Rainer Schindhelm

4 extremely easy-glide
double castors, swivelling,
2 of which antistatic,
with cap against fluids

OPX mobilis® 300 CE

Description



mobilis® 300 C Model No. 161.3110.1

Operating table with hydraulic foot pump for three different positionings: High/Low, Lateral (left/right), Trendelenburg/Reverse Trendelenburg
Manual servo-assisted adjustment of the back section. Mobile on four double castors with cap, 2 of which electrically conductive, central brake and spring-loaded directional castor activated by foot pedal.

(w/o head and leg sections)

mobilis® 300 C/G Model No. 161.3150.1

similar to model 300 C, but with integrated kidney/body elevator.*



mobilis® 300 CL Model No. 161.3210.1

similar to model 300 C, but additionally with manual longitudinal displacement of table top by up to max. 250 mm, enabling optimized use of X-ray amplifier (C-arm).

(w/o head and leg sections)

mobilis® 300 CL/G Model No. 161.3250.1

similar to model 300 CL, but with integrated kidney/body elevator.*

* Integrated kidney/body elevator (lift height 100 mm).
This function is set by means of the preselector and carried out by means of the pump lever.
In its starting position, the table top is level.

Description



Head rest Model No. 101.2580.1

servo-assisted one-hand tilting, detachable at the push of a button, with integrated X-ray cassette tunnel.



Head rest Model No. 101.2590.1

double-adjustment, servo-assisted weight compensation, detachable at the push of a button, with integrated X-ray cassette tunnel.



2 Section leg section Model No. 101.2170.1

manual swivelling and servo-assisted tilting with weight compensation, detachable at the push of a button.



Leg section Model No. 101.2180.1

one-piece version, servo-assisted tilting, detachable at the push of a button.

For further accessories, see catalogue no. 92.

OPX mobilis® 300

Technical Data

Equipment

Technical Data	300 C 300 C/G	300 CL 300 CL/G
Overall length w/o head and leg sections	1,140 mm	1,140 mm
Overall length w/o head rest, with leg section	1,780 mm	1,780 mm
Overall length with head and leg sections	2,130 mm	2,130 mm
Width of table top	540 mm	540 mm
Total width	590 mm	590 mm
Base plate (length x width)	all models: 1,120 mm x 580 mm	
Diameter of the castors	125 mm	125 mm
Height adjustment range (w/o pads)	690 mm – 1,050 mm	720 mm – 1,080 mm
Trendelenburg, hydraulic	30°	30°
Reverse Trendelenburg, hydraulic	30°	30°
Lateral adjustment (L/R), hydraulic	+/- 20°	+/- 20°
Longitudinal displacement of table top, totally	–	250 mm
Back section	+ 75/- 50°	+ 75/- 50°
Leg plate(s)	+ 20/- 90°	+ 20/- 90°
Swivelling of leg plate	55°	55°
Head rest	+ 30/- 45°	+ 30/- 45°
Tilt of head section pad	25°	25°
Net weight incl. head and leg sections	180 kg	190 kg
Weight capacity*:		
Max. static load	up to 250 kg	up to 250 kg
Safe working load	up to 185 kg	up to 185 kg

* The weight capacity may vary depending on the patient's orientation and position on the tabletop.

Standard equipment:

Two-part, radiolucent table top comprising:

- Back section
- Seat section with cut-out for gynaecology (optionally: without gyn. cut-out)



Hydraulic positioning:

- High/Low
- Trendelenburg/Reverse Trendelenburg
- Lateral









Adjustment of hydraulic positions by preselector with indicator on the base and foot pump.

Servo-assisted adjustment of the back section. Integrated X-ray cassette tunnel. Antistatic SAF pads, 60 mm thick. Table frame construction of stainless steel, sandblasted and electropolished, disinfectant-proof. Side rails of stainless steel, 25 x 10 mm, on both sides of the table top for attaching accessories, column with stainless steel panelling. Mobile on four double castors (125 mm) with caps against fluids, 2 of which antistatic, central locking by foot pedal action, 1 spring-loaded directional castor, activated by foot pedal. Mobile base in shock resistant ABS, disinfectant-proof.

300 C, 300C/G

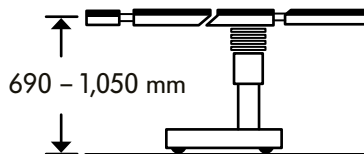

300 CL, 300 CL/G

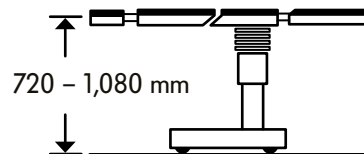

OPX mobilis® RC

The new generation for comfortable and reliable surgery

CE


mobilis® RC 40
Model No. 161.4510.1
illustrated with
head rest 101.2590.1,
leg section 101.2170.1

Soft, detachable SAF pads, pressure absorbent,
impermeable to fluids and antistatic



Electro-hydraulic backrest

Electro-hydraulic adjustment of the back section by hand-held control or manually by means of preselector and pump lever (mobilis RC 40 models only)

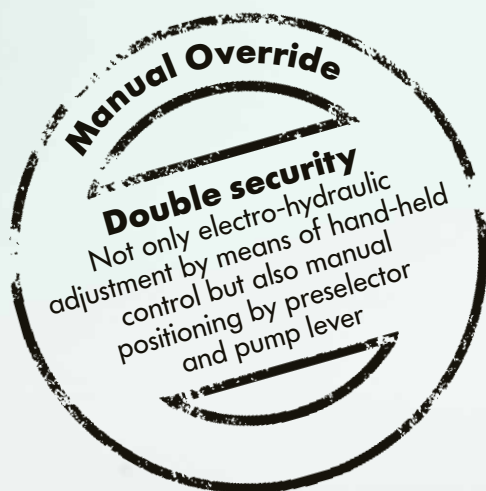

Three-way Pedal

for straight run,
free movement and
central brake of the castors

Minimum gaps between padding,
no danger of crushing



Hand-held Control

One-touch adjustment
of table movements,
easy to clean

**Battery Charge
Indicator**

Activating Key

preventing accidental table
movement

Backlit control keys

ensuring a safe and easy handling
in the darkened operating room

Reverse-Mode Key

reversion of table functions with
patient in inverted position

O-Position Key

automatically returns the table
top back to its starting position

Description



mobilis® RC 30 Model No. 161.3510.1

Universal Operating Table with electro-hydraulic adjustment by means of hand-held control for three different positionings: High/Low, Lateral (left/right), Trendelenburg/Reverse Trendelenburg
All of these table movements may also be operated manually by hydraulic foot pump. Manual servo-assisted adjustment of the back section. Rechargeable batteries. External battery charger with mains cable 230 V. Mobile on four double castors with cap, 2 of which antistatic, auxiliary directional castor and central brake activated by foot pedal.
(w/o head and leg sections)

mobilis® RC 30/G Model No. 161.3550.1

similar to model RC 30, but with integrated body/kidney elevator.*

mobilis® RC 30 L Model No. 161.3610.1

similar to model RC 30, but additionally with manual longitudinal displacement of table top by up to max. 250 mm, enabling optimized use of X-ray amplifier (C-arm).

mobilis® RC 30 L/G Model No. 161.3650.1

similar to model RC 30 L, but with integrated body/kidney elevator.*

Return-to-zero function Model No. 101.0225.0

for model RC 30, not retrofittable.



mobilis® RC 40 Model No. 161.4510.1

Universal Operating Table with electro-hydraulic adjustment by means of hand-held control for four different positionings: High/Low, Lateral (left/right), Trendelenburg/Reverse Trendelenburg, Back section
All of these table movements may also be operated manually by hydraulic foot pump. Rechargeable batteries. External battery charger with mains cable 230 V. Mobile on four double castors with cap, 2 of which antistatic, auxiliary directional castor and central brake activated by foot pedal.
(w/o head and leg sections)

mobilis® RC 40/G Model No. 161.4550.1

similar to model RC 40, but with integrated body/kidney elevator.*

mobilis® RC 40 L Model No. 161.4610.1

similar to model RC 40, but additionally with manual longitudinal displacement of table top by up to max. 250 mm, enabling optimized use of X-ray amplifier (C-arm).

mobilis® RC 40 L/G Model No. 161.4650.1

similar to model RC 40 L, but with integrated body/kidney elevator.*

Return-to-zero function Model No. 101.0226.0

for model RC 40, not retrofittable.



* Integrated kidney/body elevator (lift height 100 mm).
This function is set by means of the preselector and carried out by means of the pump lever.
In its starting position, the table top is level.

Description

Head rest Model No. 101.2580.1

servo-assisted one-hand tilting, detachable at the push of a button, with integrated X-ray cassette tunnel.



Head rest Model No. 101.2590.1

double-adjustment, servo-assisted weight compensation, detachable at the push of a button, with integrated X-ray cassette tunnel.



2 Section leg section Model No. 101.2170.1

manual swivelling and servo-assisted tilting with weight compensation, detachable at the push of a button.



Leg section Model No. 101.2180.1

one-piece version, servo-assisted tilting, detachable at the push of a button.



For further accessories, see catalogue no. 92.

OPX mobilis® RC

Technical Data

Equipment

Technical Data	RC 30 RC 30/G	RC 30 L RC 30 L/G	RC 40 RC 40/G	RC 40 L RC 40 L/G
Overall length w/o head and leg sections	1,140 mm	1,140 mm	1,140 mm	1,140 mm
Overall length w/o head rest, with leg section	1,780 mm	1,780 mm	1,780 mm	1,780 mm
Overall length with head and leg sections	2,130 mm	2,130 mm	2,130 mm	2,130 mm
Width of table top	540 mm	540 mm	540 mm	540 mm
Total width	590 mm	590 mm	590 mm	590 mm
Base plate (length x width)	all models: 1,120 x 580 mm			
Diameter of the castors	125 mm	125 mm	125 mm	125 mm
Height adjustment range (w/o pads)*	690 mm – 1,050 mm	720 mm – 1,080 mm	690 mm – 1,050 mm	720 mm – 1,080 mm
Trendelenburg*	30°	30°	30°	30°
Reverse Trendelenburg*	30°	30°	30°	30°
Lateral adjustment (L/R)*	+/- 20°	+/- 20°	+/- 20°	+/- 20°
Longitudinal displacement of table top, totally	–	250 mm	–	250 mm
Back section	+ 75/- 50°	+ 75/- 50°	+ 75/- 50°*	+ 75/- 50°*
Leg plate(s)	+ 20/- 90°	+ 20/- 90°	+ 20/- 90°	+ 20/- 90°
Swivelling of leg plate	55°	55°	55°	55°
Head rest	+ 30/- 45°	+ 30/- 45°	+ 30/- 45°	+ 30/- 45°
Tilt of head section pad	25°	25°	25°	25°
Net weight incl. head and leg sections	210 kg	220 kg	215 kg	225 kg
Weight capacity**:				
Max. static load (up to)	250 kg	250 kg	250 kg	250 kg
Safe working load (up to)	185 kg	185 kg	225 kg	225 kg
Battery operation	■	■	■	■
External battery charger 100 – 230 V, 50 – 60 Hz	■	■	■	■

■ standard equipment

* Electrohydraulic adjustment function

** The weight capacity may vary depending on the patient's orientation and position on the tabletop.

Standard equipment:

Two-part, radiolucent table top comprising:

- Back section
- Seat section with cut-out for gynaecology (optionally: without gyn. cut-out)

Electrohydraulic adjustments:

- High/Low
- Trendelenburg/Reverse Trendelenburg
- Lateral
- Back section (RC 40 models only)

Manual Override:

Manual hydraulic activation of table functions via preselector and pump lever. Servo-assisted adjustment of the back section (RC 30 models). Integrated X-ray cassette tunnel.

Antistatic SAF pads, 60 mm thick. Table frame construction of stainless steel, sandblasted and electropolished, disinfectant-proof.



Side rails of stainless steel, 25 x 10 mm, on both sides of the table top for attaching accessories, column with stainless steel panelling. Mobile on four double castors (125 mm) with caps against fluids, 2 of which antistatic, central locking by foot pedal action, 1 spring-loaded directional castor, activated by foot pedal. Mobile base in shock resistant ABS, disinfectant-proof.

Rechargeable batteries.









External battery charger with mains cable.

Note: The battery charger is fit for voltages of 100 - 230 V/standard frequency of 50 - 60 Hz, and is equipped with an appliance coupler acc. to IEC-60320 standard.

RC 30, RC 40,
RC 40/G, RC 30/G

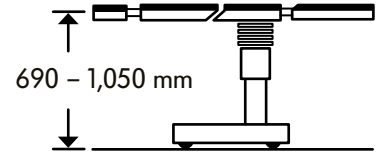

RC 30 L, RC 30 L/G,
RC 40 L, RC 40 L/G

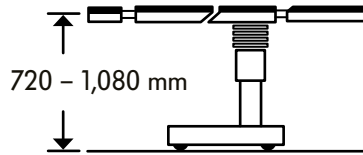

OPX mobilis® Operating Tables

Added functionality and mobility

Hand-held control

For activation of the electrohydraulic adjustment functions of the table. The hand-held control unit features a battery charge indicator as well as an activation key to prevent an accidental triggering of table movements. The function key "Reverse Mode" allows normal operation of the table functions in the case of a reverse patient positioning. Backlit keys for a safe operation in the darkened OR theatre. The hand-held control can be equipped with an optional "Return-to-zero" function.

Manual override

In addition to the electrohydraulic adjustment, manual adjustment option by means of preselector lever and hydraulic pump.

Foot control (optional accessory) for RC models

for all electric table functions. Activating and "Return to zero" keys.

Mobile base

Four easy-glide double castors with cap. Central brake and spring-loaded directional castor to be activated by foot pedal (OPX mobilis 200 excepted).

Integrated kidney/body elevator (G models)

with a lift height of 100 mm. This function is set by means of the preselector and carried out by means of the pump lever. In its starting position, the table top is level.



Hand-held control



Manual override



Foot control

		Ref. Certif. No. DE1-53352
IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST CERTIFICATES FOR ELECTRICAL EQUIPMENT (IECEE) CB SCHEME		SYSTEME CEI D'ACCEPTATION MUTUELLE DE CERTIFICATS D'ESSAIS DES EQUIPEMENTS ELECTRIQUES (IECEE) MIT THEORIE OC
CB TEST CERTIFICATE / CERTIFICAT D'ESSAI OC		
Product Nom et adresse du demandeur Name and address of the applicant Nom et adresse du fabricant Name and address of the manufacturer Nom et adresse de l'usine Name and address of the factory Nom et adresse de l'usine Note: When more than one factory, please report on page 2 Remarque: Lorsque plus d'une usine, veuillez indiquer à la page 2	Operating table Schmitz u. Sohne GmbH & Co. KG Zum Oesenfeld 29, 58739 Wickede (Ruhr) GERMANY Schmitz u. Sohne GmbH & Co. KG Zum Oesenfeld 29, 58739 Wickede (Ruhr) GERMANY Schmitz & Sohne GmbH & Co. KG Werk Boenen Rudolf-Diesel-Straße 5, 59199 Boenen GERMANY	
Ratings and principal characteristics Valeurs nominales et caractéristiques principales	DC 24 V, max. 2 A (IPS) battery charger AC 90-264 V, 50/60 Hz	
Trademark (if any) Marque de fabrique (si elle existe)		
Type of Manufacturer's Testing Laboratories used Type de programme du laboratoire d'essais constructeur	<input type="checkbox"/> Additional information on page 2	
Model / Type Ref. Ref. De type	mobilis 300, mobilis RC30, mobilis 200, mobilis RC40, OPX mobilis RC	
Additional information (if necessary may also be reported on page 2) Les informations complémentaires (si nécessaire, peuvent être indiquées sur la 2 ^{ème} page)	<input type="checkbox"/> Additional information on page 2	
A sample of the product was tested and found to be in conformity with the specification of the product as it is issued and a file consulted conforming to it	IEC 60601-1 (ed.3):am1 IEC 60601-2-44 (Ed.2)	
As shown in the Test Report Ref. No. which forms part of this Certificate Comme indiqué dans le Rapport d'essais numéro de référence qui constitue partie de ce Certificat	5007249-2863-000/1/193930	
This CB Test Certificate is issued by the National Certification Body Ce Certificat d'essai OC est établi par l'Organisme National de Certification		
VDE Prüf- und Zertifizierungsinstitut GmbH VDE Testing and Certification Institute Zertifizierung Produkte / Certification Products		
Date: 2014-12-03	Signature:	

Tested for safety following the CB scheme according to IEC 60601 by an independent and authorized German testing institute.



Mobile base



Preselector for kidney bridge function



Integrated kidney bridge

OPX mobilis® Operating Tables

Added functionality and mobility

1

Battery charger

for electro-hydraulic tables, removable. Charging time: approx. 8 hrs, small and handy execution, resistant to damages; IEC 60320 standard plug socket with inserted mains cable. Trickle charging of batteries.

2

A **fixation of the pads by means of adhesive gel strips** provides optimal retention of the pads. The adhesive gel strips are **disinfection-proof**, thus creating optimised hygienic conditions inside the OR theatre.

3

Optional accessory: Radiolucent CFRP bar at the back section.

4

Head and leg plates removable at the push of a button

Patient positioning in reverse mode thanks to an easy exchange of head and leg plate. The interlocking adaptors allow an easy attachment of the table elements.

5

The SAF mattresses ensure prevention of pressure ulcers along with enhanced patient comfort.

6

Continuous rails for X-ray cassette insertion.

7

Central delivery point for connection of mains cable and potential equalization. Activating key and display for technical status information.


8


Castors with caps for splash protection

9

Longitudinal shift of tabletop (L models)

by up to 250 mm

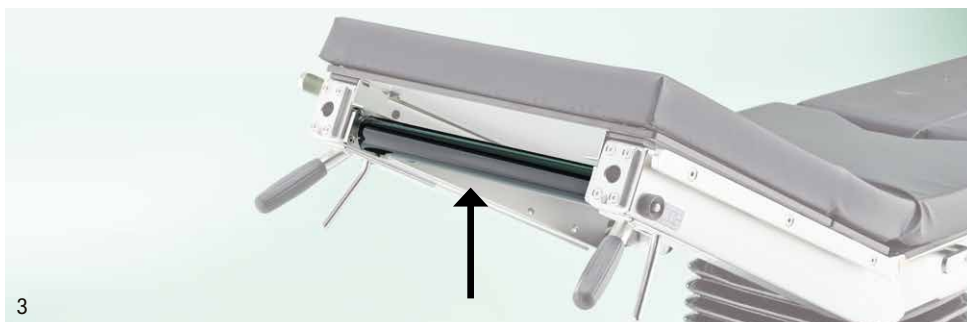

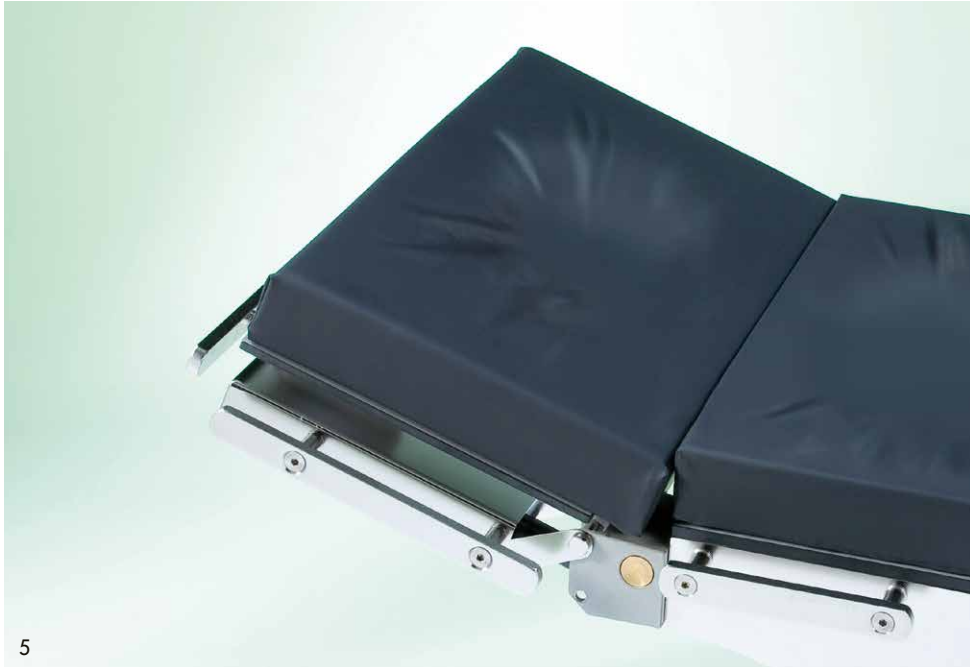

OPX mobilis® 300, RC 30, RC 40

Positionings



Kidney and thoracic surgery



Nailing of the upper arm



Laparoscopy



Neurosurgery



Arthroscopy



Urology



Neurosurgery



Urology

OPX mobilis® 300, RC 30, RC 40

Positionings





Spinal surgery



Shoulder surgery



OMFS



Accessories ref.
101.0242.0 +
101.0364.0 +
101.0266.0

OPX mobilis® 300, RC 30, RC 40 Positionings





Fracture of neck of femur



Tibial shaft fracture

Accessory kits suitable for different surgical disciplines

OPX mobilis® Operating tables

General Surgery

- 101.2580.1 Head section
- 101.2170.1 Leg section
- 101.0019.0 Arm rest
- 101.0123.0 Wristlet
- 101.0177.0 Body restraint strap
- 101.0012.0 Anaesthetic frame
- 101.0111.0 Anaesthetic frame extension

Gynaecology

- 101.2580.1 Head section
- 101.2170.1 Leg section
- 2x 101.0115.0 Leg support (Goepel type)
- 2x 101.0146.0 Attachment clamp
- 101.0019.0 Arm rest
- 101.0123.0 Wristlet
- 101.0012.0 Anaesthetic frame
- 101.0111.0 Anaesthetic frame extension

ENT/OMFS

- Table model without gyn. cutout
- Variant 1
- 101.2580.1 Head section
- 101.0332.0 Gel head ring
- 101.2180.1 Leg section
- Variant 2 - Reverse Mode Positioning instead of leg section
- 101.2720.0 Universal adaptor
- 101.0363.0 Connecting piece
- 101.0155.0 Shaped head rest
- Variant 3 - Reverse Mode Positioning instead of leg section
- 101.2780.1 Shoulder plate
- 101.0363.0 Connecting piece
- 101.0155.0 Shaped head rest
- additionally, for all three variants
- 2x 101.0019.0 Arm rest
- 101.0177.0 Body restraint strap
- optionally
- 101.6400.0 Foot control (RC models only)

Urology/TUR

- 101.2580.1 Head section
- 101.2170.1 Leg section
- 101.6010.1 Urological adapter
- 101.0182.0 Deep drain basin
- 101.0191.0 TUR Sieve
- 101.6020.0 Pair of elbow rests
- 2x 101.0115.0 Leg support (Goepel type)
- 2x 101.0146.0 Attachment clamp
- 101.0019.0 Arm rest
- 101.0123.0 Wristlet
- 101.0012.0 Anaesthetic frame
- 101.0111.0 Anaesthetic frame extension

Kidney and Thorax surgery

- OPX mobilis L/G-model
- 101.2590.1 Head section
- 101.2170.1 Leg section
- 101.0352.0 Gel lateral positioner
- 3x 101.0121.0 Bracket for body supports
- 2x 101.0162.0 Back/buttock support
- 101.0175.0 Pubis/sacrum/sternum support
- 2x 101.0192.0 Arm rest
- 101.0177.0 Body restraint strap
- 101.0012.0 Anaesthetic frame
- 101.0111.0 Anaesthetic frame extension

Minimal invasive surgery/ Laparoscopy

- 101.2580.1 Head section
- 101.2170.1 Leg section
- 101.0019.0 Arm rest
- 101.0123.0 Wristlet
- 2x 101.0164.0 Leg restraint strap
- 101.0012.0 Anaesthetic frame
- 101.0111.0 Anaesthetic frame extension
- optionally
- 2x 101.0115.0 Leg support (Goepel type)
- 2x 101.0146.0 Attachment clamp

Vascular surgery

- OPX mobilis RC 40 L without gyn. cut-out
- 101.2580.1 Head section
- 101.2170.1 Leg section
- 2x 101.0019.0 Arm rest
- as an alternative for 101.2170.1
- 101.7154.0 Carbon plate
- 2x 101.7152.0 Side rail for carbon plate

Ophthalmology

- Patient positioning in reverse mode
- L table model without gyn. cutout
- 101.2180.1 Leg section
- 101.0019.0 Arm rest
- 101.2780.1 Shoulder plate
- 101.0256.0 Horseshoe head rest with one-hand operation
- alternatively
- 101.2720.0 Universal adaptor
- 101.0256.0 Horseshoe head rest with one-hand operation
- optionally
- 101.6400.0 Foot control (RC models only)

Rectum surgery

- Variant 1 in lithotomy position
- 101.2580.1 Head section
- 2x 101.0115.0 Leg support (Goepel type)
- 2x 101.0146.0 Attachment clamp
- 2x 101.0019.0 Arm rest
- 101.0010.0 Pair of shoulder supports
- Variant 2 in prone position
- 101.2580.1 Head section
- 101.2170.1 Leg plates with gyn. cutout
- 2x 101.0019.0 Arm rest
- 101.2070.1 Knee/foot rest
- 2x 101.0190.0 Lateral support pad
- 101.0178.0 Rectoscopy/Buttocks support
- 2x 101.0146.0 Attachment clamp
- 101.0012.0 Anaesthetic frame

Neurosurgery

- 101.2780.1 Shoulder arthroscopy plate
- 101.2170.1 Leg section
- in supine/prone position:
- 101.2720.0 Universal adaptor
- 101.0113.0 Doro Skull clamp adaptor
- 101.0142.0 Doro Universal basic unit
- 101.0127.0 Doro-Skull-Clamp
- in Beach-Chair position:
- 101.0014.0 Cross-bar attachment
- 2x 101.0018.0 Attachment clamp
- 101.0113.0 Doro Skull clamp adaptor
- 101.0142.0 Doro Universal basic unit
- 101.0127.0 Doro-Skull-Clamp
- 2x 101.0019.0 Arm rest
- alternatively:
- accessories for head positioning made of radiolucent material

Traumatology (fracture treatment of the lower limbs)

- Table model without gyn. cutout
101.2580.1 Head section
101.0270.0 Extension device with basic accessories:
2x extension bar supports
2x foot plates for adults
2x traction boots for adults
1x countertraction post for dorsal position
101.5250.0 Mounting for extension device (except L-models)
101.0251.0 Mounting arbor
101.0491.0 Positioning plate for dorsal position
101.0324.0 Positioning plate for lateral position
101.0350.0 Countertraction post for lateral position
101.0290.0 Transport trolley
or
101.0221.0 Transport trolley
101.0218.0 Transfer leg plates (pair)
101.0019.0 Arm rest
101.0012.0 Anaesthetic frame
101.0137.0 Wristlet

Fractures of the femur and neck of the femur, additional access.

- 101.0115.0 Leg support (Goepel type)
101.0146.0 Attachment clamp
101.0193.0 Side rail extension

Fractures of the lower legs, additional access.

- 101.0280.0 Positioning device for the lower leg
101.0165.0 Kirschner wire device
101.0254.0 Condyle fixation
101.0115.0 Leg support (Goepel type)
101.0146.0 Attachment clamp
101.0193.0 Side rail extension

Traumatology (fracture treatment of the upper arm and forearm)

- 101.2580.1 Head section
101.2170.1 Leg section
101.0136.0 Upper arm positioning device
101.0146.0 Attachment clamp
101.0152.0 Countertraction post for upper arm
101.0146.0 Attachment clamp
101.0163.0 Weinberger hand traction device
in prone position:
101.0122.0 Upper arm positioning plate
101.0117.0 Attachment clamp
for forearm extension:
101.0257.0 Axilla support
101.0258.0 Elbow support
101.0105.0 Traction unit
101.0123.0 Wristlet
101.0177.0 Body restraint strap

Arm/Hand surgery

- 101.2580.1 Head section
101.2170.1 Leg section
101.0070.1 Arm/hand operating table
as an alternative for 101.0070.1
101.0108.0 Arm/hand operating table (radiolucent CFRP board)
101.0019.0 Arm rest
101.0177.0 Body restraint strap
101.0012.0 Anaesthetic frame

Spinal surgery

- 101.2580.1 Head section
101.2170.1 Leg section
in prone position:
101.7154.0 Carbon plate
2x 101.7152.0 Side rail for carbon plate
in knee/elbow position:
101.2070.1 Knee/foot rest
2x 101.0190.0 Lateral support pad
101.0178.0 Buttocks support
2x 101.0146.0 Attachment clamp
101.0355.0 Gel large prone positioner
2x 101.0019.0 Arm rest
101.0012.0 Anaesthetic frame

Knee arthroscopy

- 101.2580.1 Head section
101.2170.1 Leg section
101.0212.0 Knee arthroscopy positioning device
101.0146.0 Attachment clamp
alternatively
101.0583.0 Knee arthroscopy positioning device
101.0164.0 Leg restraint strap
101.0019.0 Arm rest
101.0012.0 Anaesthetic frame
101.0137.0 Wristlet

Shoulder arthroscopy

- in Beach-Chair position:
101.0242.0 Shoulder surgery plate
101.2170.1 Leg section
101.0266.0 Shaped head rest for shoulder surgery
101.0364.0 Head rest connector
2x 101.0019.0 Arm rest
101.0177.0 Body restraint strap
in lateral position:
101.0253.0 Shoulder traction device
101.0265.0 Sterile arm trap

Adiposity surgery

- RC 40 model
101.2580.1 Head section
101.2170.1 Leg section
as an alternative for the leg section
101.0219.0 Leg support, Goepel type (heavy duty)
2x 101.0147.0 Attachment clamp
101.0194.0 Extension plates (two-part set)
101.0200.0 Extension plates (two-part set)
101.0455.0 Body strap
2x 101.0019.0 Arm rest
101.2070.1 Knee/foot rest
or
101.0368.0 Foot rest (pair)
101.0010.0 Pair of shoulder supports
2x 101.0164.0 Leg restraint strap



SCHMITZ

A SENSE OF CONFIDENCE

**SCHMITZ u. Söhne
GmbH & Co. KG**


P. O. Box 14 61
58734 Wickede (Ruhr)
Germany (postal address)
Zum Ostenfeld 29
58739 Wickede (Ruhr)
Germany (visiting address)
T +49 (0)2377 84 0
F +49 (0)2377 84 135
www.schmitz-soehne.com
export@schmitz-soehne.de

Technical service, hotline:
T +49 (0)2377 84 549
F +49 (0)2377 84 210
service@schmitz-soehne.de

All articles including correspond-
ing accessories marked with
the CE label meet the standards
for medical devices acc. to
MPG and the EC regulation
93/42/EEC.



The products may only be used
for their intended purpose of use.
Please also observe our operating
manual!




[f/schmitz.soehne](https://www.facebook.com/schmitz.soehne)




**Information on
our establishments
worldwide can be found
on our website.**

DIAMOND

A class of its own

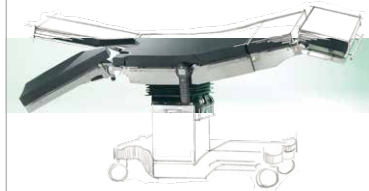

Accessories for DIAMOND and OPX mobilis® operating tables



varimed® Furniture for OR theatres and outpatient departments



Our goods and services are to be understood ex works. Deliveries are effected via our authorized partners or branch offices. The company reserves the right to alter the design, construction, dimensions and finish of its products without notice. All relevant dimensions and weights are to be understood as approximate information/data. Due to technical reasons colour deviations are possible. The articles shown in this catalogue are not authorized for sale in the United States. SCHMITZ Catalogue No. 60, 01.2018 GB
Nominal charge 3.00 Euro.